


# TremPly® TPO Detailing Membrane

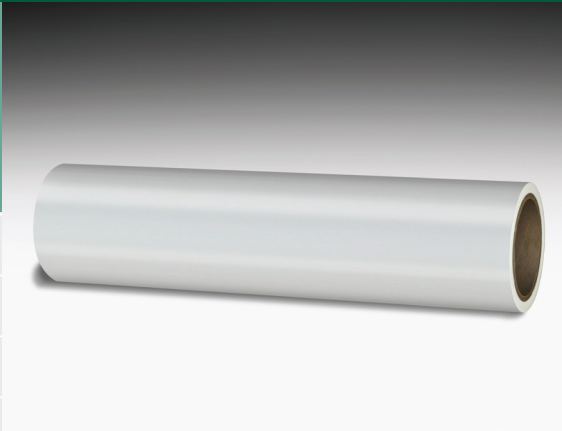

## An Accessory Designed for TremPly TPO Single Ply Roof System

### FEATURES

Made with TremPly TPO membrane  
Factory-built accessories  
Uniform look

### BENEFITS

Cost effective  
Improved reliability, reduces risk of leaks and callbacks  
Improved aesthetics

### DESCRIPTION:

TremPly® TPO Detailing Membrane provides roofing contractors with an easy-to-install, factory-built detail. It is constructed using proven, durable TremPly TPO 55 mil unreinforced TPO membrane.

### BASIC USES:

TremPly TPO Detailing Membrane is used as an alternative material for flashing penetrations and corners of base and curb flashing. This TPO accessory is manufactured to strict specifications, designed for ease of installation and required wherever preformed vent boots cannot be used. The membrane is unreinforced, so it's easier to work with at difficult flashing details.

### COLORS:

White

### SIZE:

24" x 50' (610 mm x 15.24 m) rolls; Weight per roll, 28 lbs (12.7 kg).

### APPLICATION:

TremPly TPO Detailing Membrane is designed for use with TremPly TPO and may be installed on TremPly TPO 45, 60, and 80 mil mechanically attached or fully adhered roofing systems.

### MAINTENANCE:

Your local Tremco Roofing representative can provide you with effective maintenance procedures, which may vary depending upon specific conditions. Periodic inspections, early repairs and preventive maintenance are all part of a sound roof program.

### TECHNICAL SERVICES:

Your local Tremco Roofing representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



7140  
3/20/18

[www.tremcoroofing.com](http://www.tremcoroofing.com)  
3735 Green Road  
Beachwood, Ohio 44122  
1.800.852.6013



50 Beth Neelson Drive  
Toronto, Ontario M4H 1M6  
1.800.668.9879

TremPly is a U.S. registered trademark of Tremco Incorporated.

The information provided on this data sheet is effective as of December 2017 and supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCES SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.